


Series 5506 T5 Pendant

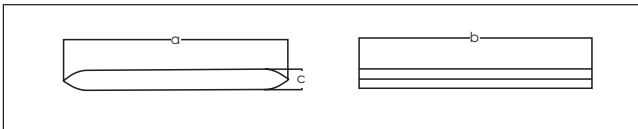

5506 Pendant T5 4x14
a-570
b-590
c-54

SERIES 5506 T5 PENDANT

Suspended luminaire for direct or direct/indirect lighting for T5 fluorescent lamps

Body: Press-bent 0.50mm perforated sheet steel with white powder paint finish. And 1.5 mm.anodized aluminium profile sides.

Optical accessories: Ideal for work environments with computer display monitors. Louvre with broad symmetrical batwing light distribution featuring longitudinal reflectors and double transverse blades, in anodized anti-iridescent %99.90 pure Aluminium MIRO reflektor with mirror finish.

Control gear and electric circuit: 230V 50Hz., with HT 90C heat-resistant hard wires and preheat T5 Electronic Ballast.

Applications: Offices,Hotels,Shopping centers,Hospitals,Schools

Type	Lamp	Dimension (mm)	Weight (Kg)
5506 Pendant T5	Class: 1	IP 40	
CE	230V 50Hz.		
5506 / 214 / 16 EB	2xF14W/T5	290x590x57	5
5506 / 224 / 16 EB	2xF14W/T5	290x590x57	5
5506 / 324 / 16 EB	3xF14W/T5	570x590x57	5.5
5506 / 314 / 16 EB	3xF28W/T5	570x590x57	5.5
5506 / 414 / 16 EB	4xF28W/T5	570x590x57	5.7
5506 / 128 / 16 EB	1xF28W/T5	230x1190x57	6
5506 / 228 / 16 EB	2xF54W/T5	290x1190x57	6.2
5506 / 154 / 16 EB	1xF54W/T5	230x1190x57	6
5506 / 254 / 16 EB	2xF54W/T5	290x1190x57	6.2
5506 / 135 / 16 EB	1xF35W/T5	230x1790x57	14
5506 / 235 / 16 EB	2xF35W/T5	290x1790x57	14.2

