


Series 5500 T5

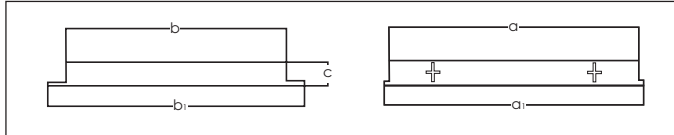

5500 T5 4x14
a-575 a1-595
b-510 b1-595
c-57

Type	Lamp	Dimension (mm)	Weight (Kg)
5500 T5	Class: 1	IP 40	
CE	230V 50Hz.		
5500 / 214 / 16 EB	2xF14W/T5	595x595x57	4.5
5500 / 314 / 16 EB	3xF14W/T5	595x595x57	5
5500 / 414 / 16 EB	4xF14W/T5	595x595x57	5.2
5500 / 128 / 16 EB	1xF28W/T5	230x1195x57	5.5
5500 / 228 / 16 EB	2xF28W/T5	295x1195x57	5.7
5500 / 328 / 16 EB	3xF28W/T5	595x1195x57	9
5500 / 154 / 16 EB	1xF54W/T5	230x1195x57	5.5
5500 / 254 / 16 EB	2xF54W/T5	290x1195x57	5.7
5500 / 354 / 16 EB	3xF54W/T5	570x1195x57	9
5500 / 135 / 16 EB	1xF35W/T5	230x1795x57	13
5500 / 235 / 16 EB	2xF35W/T5	290x1795x57	13.2
5500 / 335 / 16 EB	3xF35W/T5	570x1795x57	17

SERIES 5500 T5

Recessed luminaires for mounting on exposed 24mm T sections of 600mmx600mm.

This luminaire is also suitable for mounting Plaster and Metal (clip-in) suspended ceilings by using Metal mounting clips.

Body: Press-bent 0.50mm perforated sheet steel with white powder paint finish.

Optical accessories: Ideal for work environments with computer display monitors. Louvre with broad symmetrical batwing light distribution featuring longitudinal reflectors and double transverse blades, in anodized anti-iridescent 99.90% pure Aluminium MIRO reflektor with mirror finish.

Control gear and electric circuit: 230V 50Hz., with HT 90C heat-resistant hard wires and preheat T5 Electronic Ballast.

Applications: Offices, Hotels, Shopping centers, Hospitals, Schools